

DENT EXTERIOR LUMINAIRE



Aluminium

Black


White

PRODUCT INFORMATION

| Order Code | Power | Lumens | CCT | Body Colour | CRI (Ra) | IP Rating | Beam Angle | Dimmable | Emergency | Sensor | Size | SKU Number | Carton Qty | Weight |
|------------|-------|---------------|---------------------|-----------------------------|----------|-----------|------------|----------|-----------|--------|------------------|---------------|------------|--------|
| SCI-2651 | 6w | 440, 466, 485 | 3000k, 4000k, 5000k | Powder Coated White | 82 | 54 | 120° | N/A | N/A | N/A | 143 x 180 x 41mm | 9376047819730 | 10 | 7kg |
| SCI-2652 | 6w | 440, 466, 485 | 3000k, 4000k, 5000k | Powder Coated Black | 82 | 54 | 120° | N/A | N/A | N/A | 143 x 180 x 41mm | 9376047819740 | 10 | 7kg |
| SCI-2653 | 6w | 440, 466, 485 | 3000k, 4000k, 5000k | Polished Anodised Aluminium | 82 | 54 | 120° | N/A | N/A | N/A | 143 x 180 x 41mm | 9376047819754 | 10 | 7kg |

| Voltage | Frequency HZ | IK Rating | Diffuser | Body Material | Mounting Type | Wiring Type |
|---------|--------------|-----------|-----------------|--------------------|----------------|-------------|
| 240v | 50Hz | N/A | Glass / Frosted | Anodised Aluminium | Ceiling / Wall | Hardwire |

DIMENSIONS

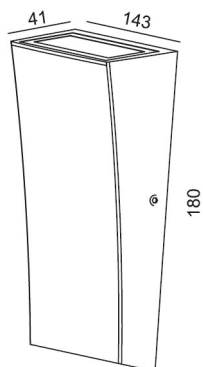

SPECIFICATIONS

Tri-Colour Switch

CCT 3000k, 4000k, 5000k

Lumens 440LM / 466LM / 485LM

Built in Driver

6W

IP54

120° Beam Angle

Die-Cast Anodised Aluminium

Powder Coated Wht, Blk, & Polished Anodised Aluminium

Frosted Glass

Polished Reflector

3 Year Warranty